

DUAL TIME HAND SETTING

Quick set the dual time

Adjust the dual time hour hand by pressing button A or B while crown is in normal position.

Button A, - 1 hour each push / Button B, +1 hour each push

Precise adjustment of the dual time

Unscrew and pull out the crown to second click position when the second hand is at the 12 o'clock position.


Adjust the dual time hand by pressing button A or B.

Button A: -10 minute / **Button B:** +10 minute each push.

Screw the crown back tight to ensure water resistance.

RESET CIRCUIT AFTER BATTERY REPLACEMENT

After the battery is replaced with a new one or after the battery is reinstalled, Be sure to short-circuit by touching the AC terminal of the circuit block and the main plate with conductive tweezers. This will reset the circuit as illustrated below.

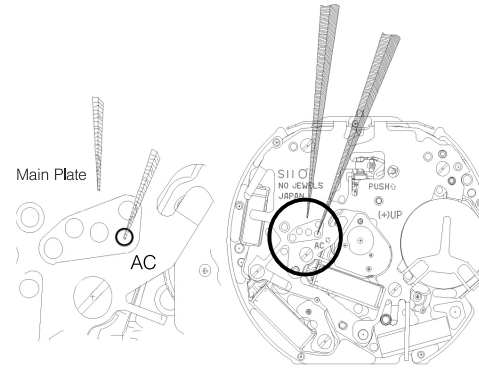


STORM

LONDON

AQUA-PRO
SPECIAL EDITION

FEATURES

1000M WATER RESISTANT, DUAL TIME, 24HR, ROTATING BEZEL
AUTOMATIC HELIUM RELEASE VALVE

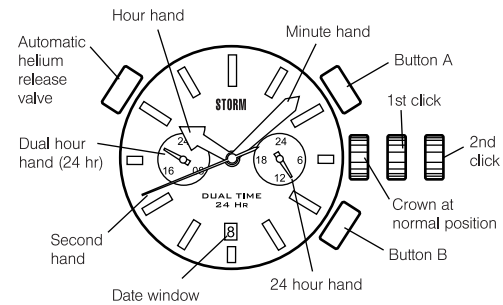

ADJUSTING DUAL TIME HAND POSITION

After setting or changing the battery, and before setting the time, check if the dual time hour hand is at the "0" (24 o'clock) position. If not, reset it following the procedure shown below :

Unscrew and pull out the crown to second click position. Keep the buttons A & B pressed at the same time for 3 seconds, then release. Dual time hand moves slightly and returns to where it was.

Press button A or B to reset the dual time hand to "0" position. The hand moves quickly if the respective buttons are kept pressed. Push the crown back to normal position and screw tightly.

AUTOMATIC HELIUM RELEASE VALVE

Operates automatically when there is a difference in pressure between the inside and outside of the watch during decompression. This allows any helium gas to escape, thereby protecting the watch from damage.

SETTING THE TIME/DATE

Unscrew the crown anti-clockwise to set time/date. Pull crown to the second click position and turn to change the time. Pull crown to the first click position and turn clockwise to change the date. After setting date/time, please screw the crown back tight to ensure water resistance.

Do not operate crown/buttons when the watch is wet or in water.

Note : *Do not set the date during any time between 9:00 P.M. and 1:00 A.M. Otherwise, the date may not change properly.
*The 24 hour hand runs automatically with the hour hand.
*The date changes at midnight. When setting the time, make sure that AM/PM is correctly set by using the 24 hour hand as an AM/PM indicator.

